FIGURE 1

FEASIBILITY

100

Feasibility

The following figure depicts suggested network configuration:

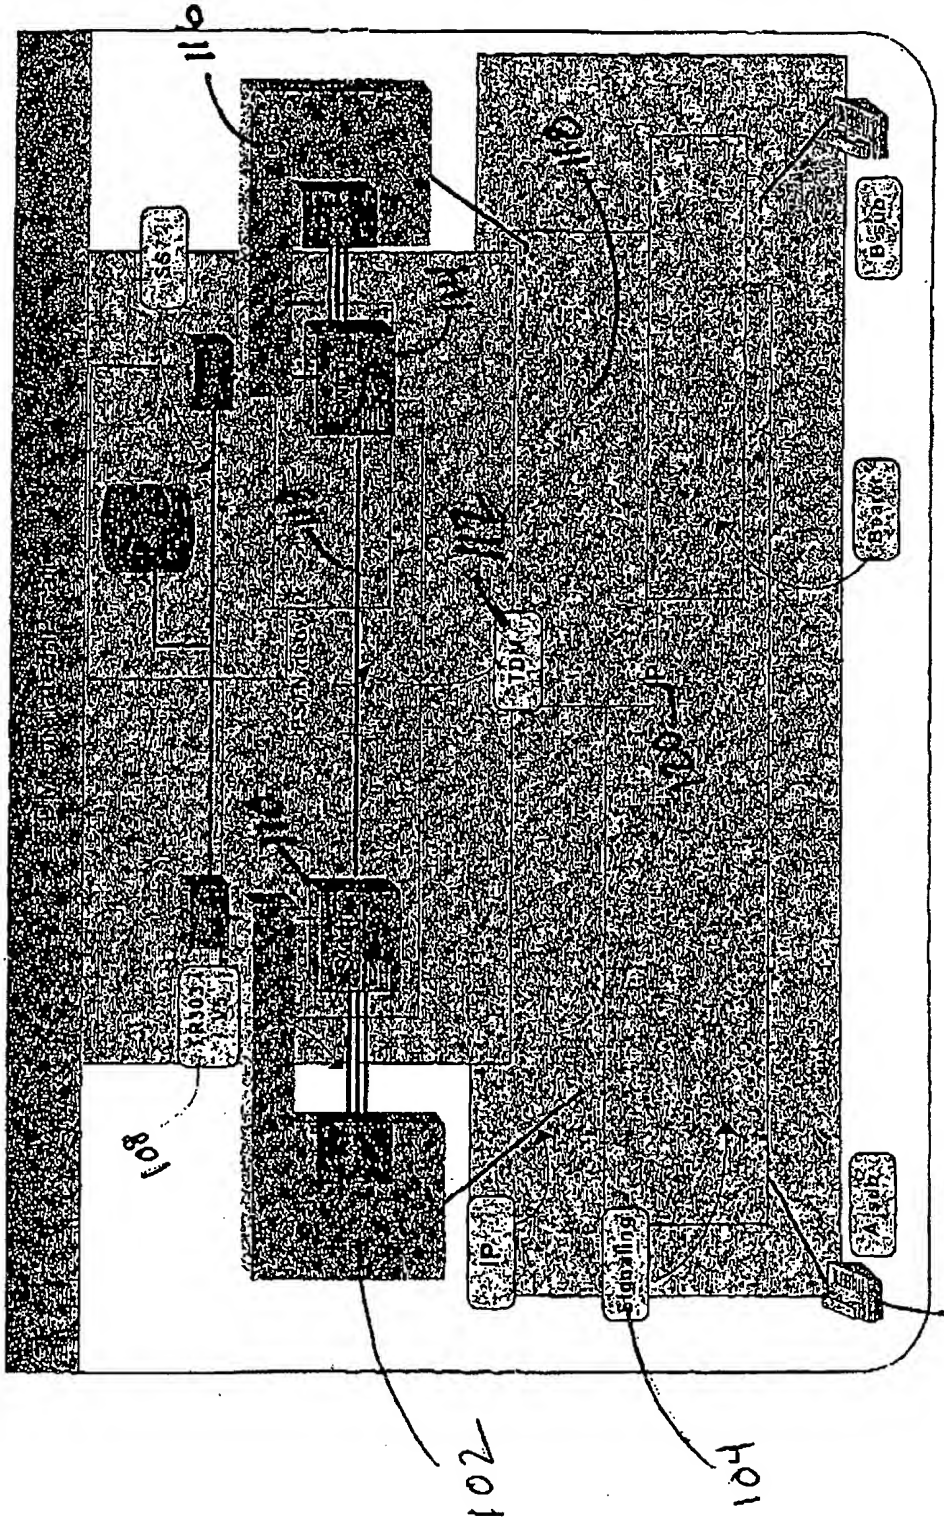

Figure 1

4

FEASIBILITY

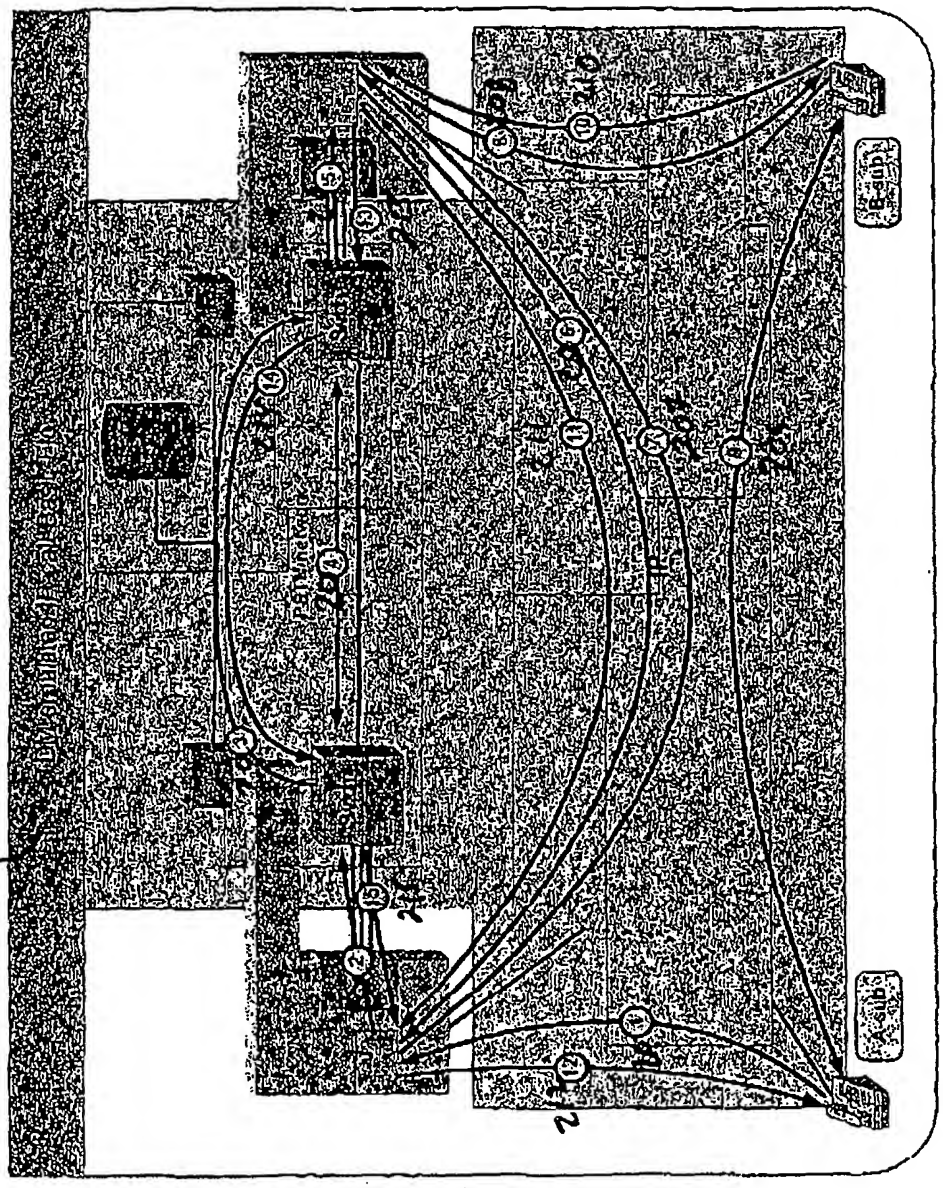

Figure 2

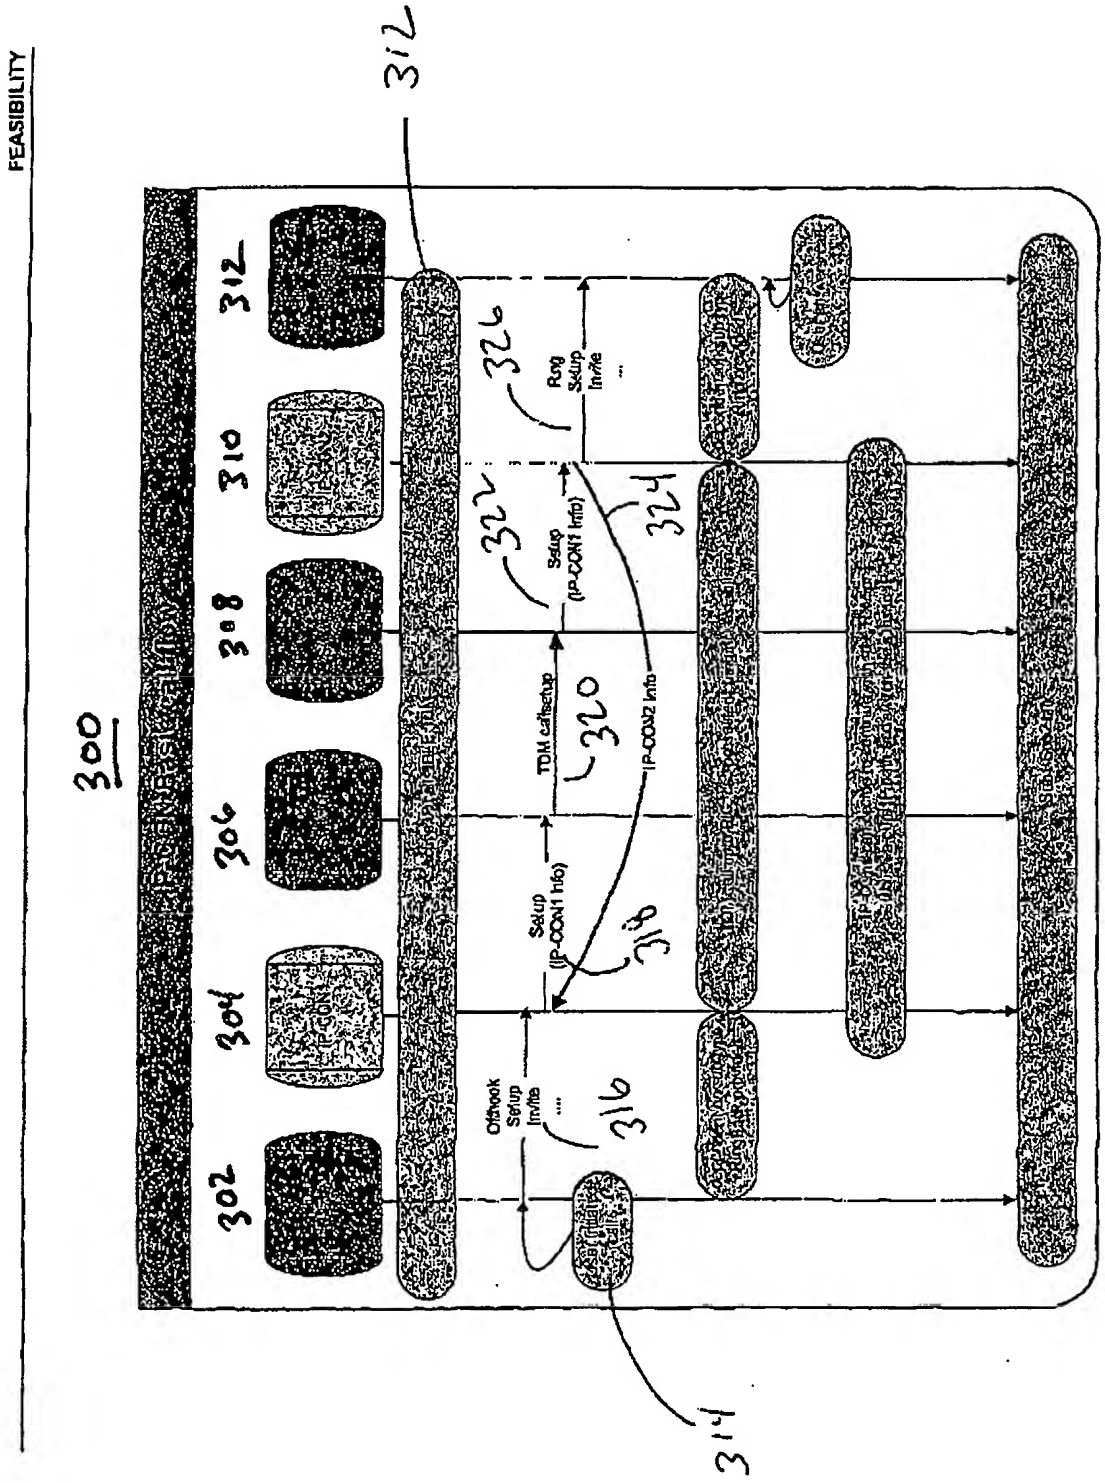
FEASIBILITY
300
302
304
306
308
310
312
314
316
318
320
322
324
326
Offhook Setup Inv/Ite
Setup (IP-CON1 Info)
TDM callsetup
IP-CON2 Info
Setup (IP-CON1 Info)
Ring Setup Inv/Ite

Figure 3

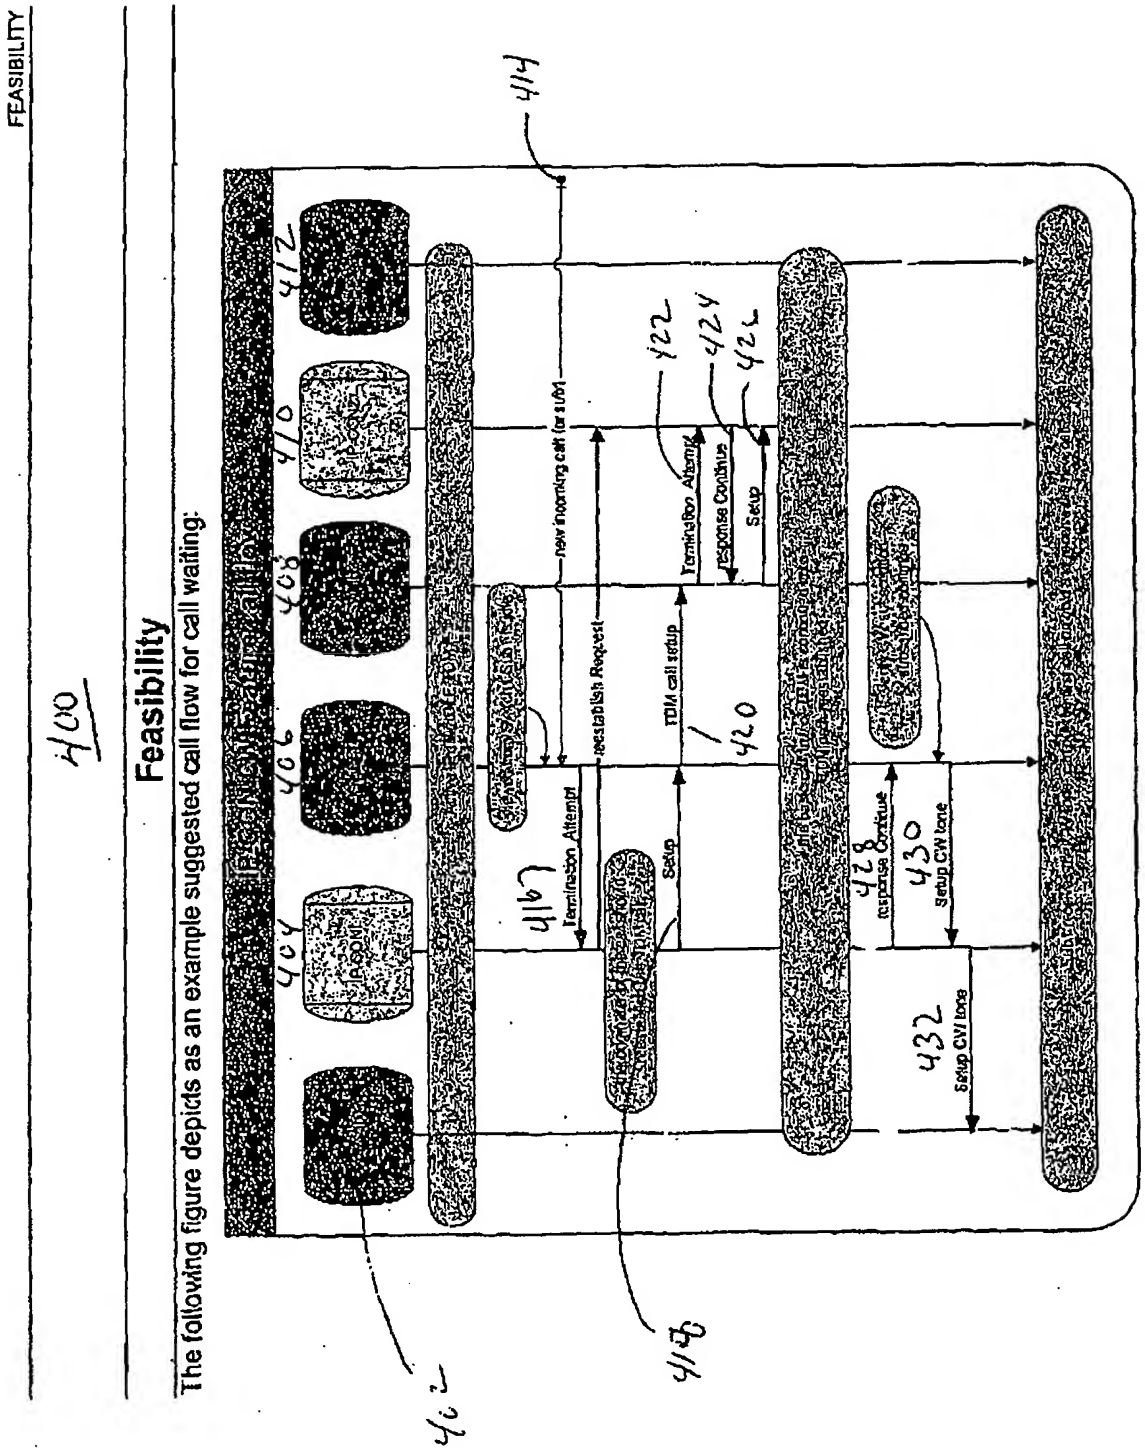
FEASIBILITY
410
Feasibility
The following figure depicts as an example suggested call flow for call waiting:
404
406
408
410
412
414
416
418
420
422
424
426
428
430
432
new incoming call (or similar)
Termination Attempt
Setup
ISDN call setup
Termination Attempt
response Continue
Setup
response Continue
Setup CW tone
Setup CW tone

Figure 4